

ELECTRICAL INSPECTION BULLETIN

(Effective 2002-02/01)

SERVICE FOR TRAVEL TRAILERS


(OTHER THAN FOR CONSTRUCTION SITES)
120/240 VOLT AMP OR LESS

LEGEND:

1. SERVICE HEAD
2. DRIP LOOP MIN. 750mm
3. CONDUIT MIN. 3/4"
4. METER BASE (MOUNTING HEIGHT
MAX 1.8m, MIN 1.4m TO CENTER)
5. CSA CEMA 3 WEATHERPROOF
SERVICE ENTRANCE SWITCH
OR CEMA 1 OR CEMA 2
ENCLOSED IN A CEMA 3
ENCLOSURE.
6. WEATHERPROOF OUTLET
BOX C/W WEATHERPROOF
COVER & RECEPTACLE
(SEE NOTE)
7. GROUNDING CONDUCTOR AS
PER C.E.C. TABLE 17
8. POWER SUPPLY CABLES AS
PER C.E.C. TABLE 11
9. COPPER, BRONZE OR BRASS
GROUND ROD CLAMP
10. GROUND ROD/GROUND PLATE
11. CONDUIT STRAP
12. CABLE STRAP

NOTES:

- MAX-OVER CURRENT PROTECTION SHALL NOT EXCEED THE RATING OF THE RECEPTACLE
- ALL DIMENSIONS ARE IN MILLIMETERS

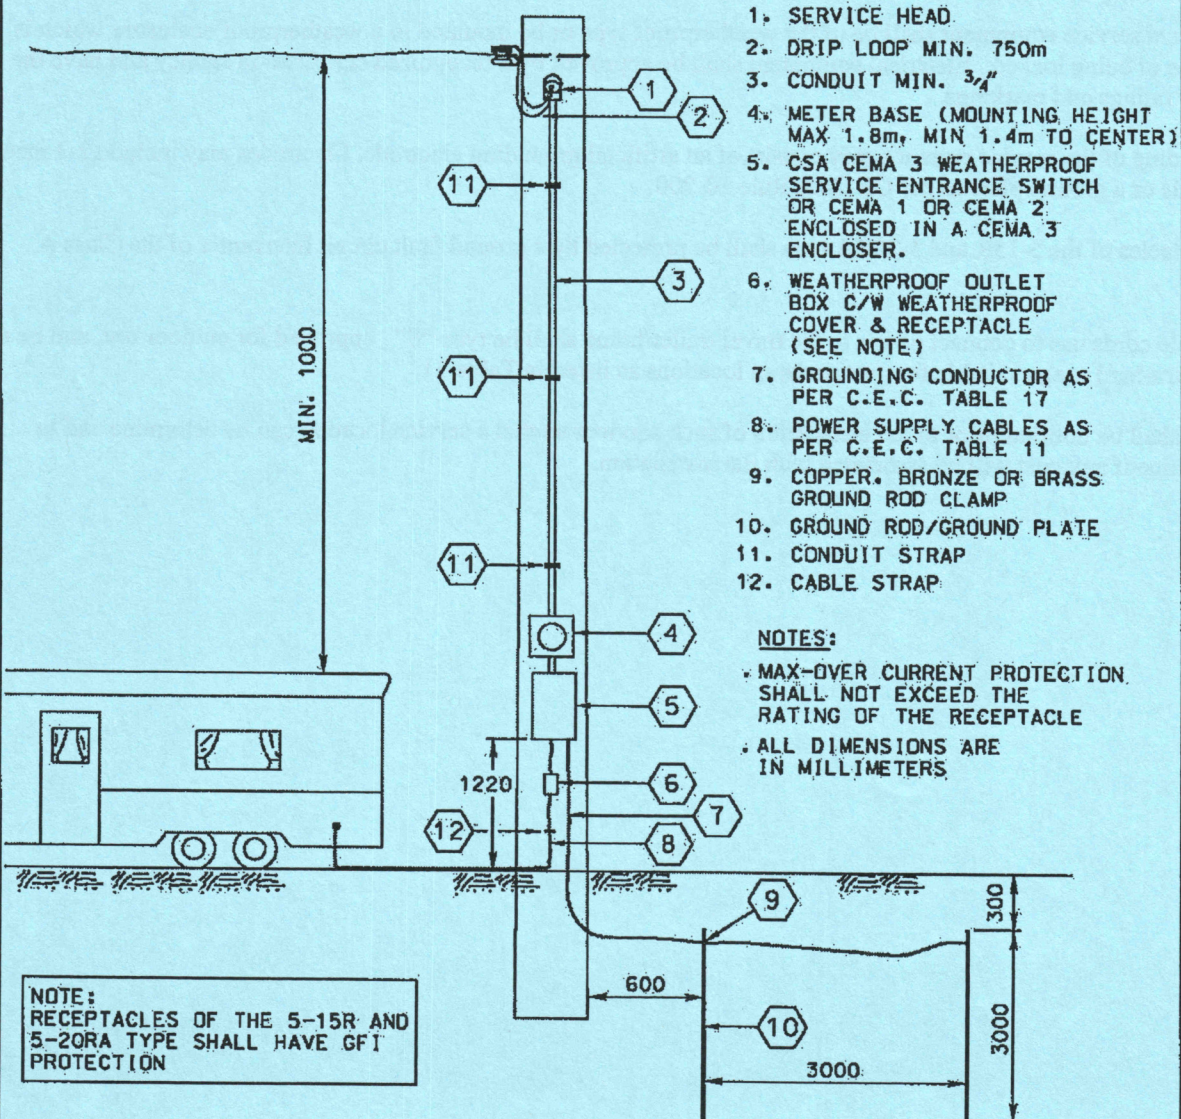

NOTE:
RECEPTACLES OF THE 5-15R AND
5-20RA TYPE SHALL HAVE GFI
PROTECTION